
Keysight L4445A

Microwave Switch/Attenuator Driver

Data Sheet



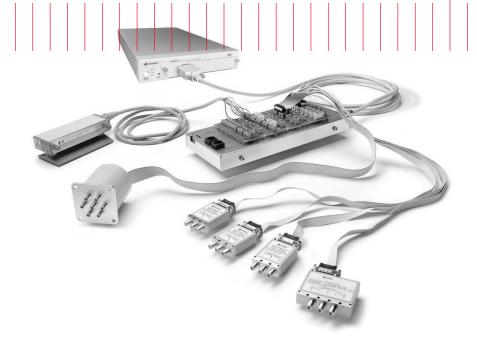

Introduction

Microwave switch/attenuator driver offers support of most common microwave switches with distribution boards for easy configuration.

The Keysight Technologies, Inc. L4445A is a LXI Class C compliant instrument that controls external switches and attenuators. With its small size and Ethernet connectivity, the switch/attenuator driver can be placed wherever your application needs it.

The Keysight L4445A provides digital outputs to control switches, attenuators, and other devices that are typically used to route signals in a high frequency system. Many of the most popular microwave switches and attenuators are supported through the distribution boards. The distribution boards enable fast and easy connection to the microwave devices.

Using this LXI instrument, you'll get all the benefits of an Ethernet connection, instrument Web server, standard software drivers and more. The LXI standard is supported by multiple vendors, enabling lower cost of test with accelerated test integration and development.

- LXI compliance includes built-in Ethernet connectivity
- Fully-featured graphical Web interface
- Control of most popular microwave switches and attenuators
- Expandable with 34945EXT
- Distribution boards allow for easy wiring
- Switch read-back capabilities
- External power option for simultaneous switching
- Software drivers for most common programming environments

Microwave switch driver for easy routing of high frequency signals in your system

The L4445A allows you to control switches, attenuators and other devices close to your device under test. The L4445A combined with the 34945EXT provides the power and control signals to drive up to 64 switch coils—that's 32 standard SPDT switches.

The L4445A can be extended by adding additional 34945EXT extenders. The first 34945EXT is powered by the L4445A. You can add up to seven additional 34945EXT extenders with user supplied power. Multiple switch operations are performed in sequential order, or for faster, simultaneous switching, you can connect an external power supply to the 34945EXT.

The digital outputs can also be used to drive LEDs for indication of the switch position. The L4445A/34945EXT also has digital inputs so that you can read back the actual position of the switch or attenuator.

The L4445A comes with a standard 9-pin connector for simple connection to the 34945EXT. The Y1150A-Y1155A distribution boards plug onto the 34945EXT and are used to route the power and control signals from the driver to the switches using user supplied cables. This enables simple connections to the external switches without a lot of complicated wiring.

The following microwave switches and attenuators are supported with the Y1150A-Y1155A distribution boards:

- N181x/U9397x series SPDT switches
- 8762/3/4 series SPDT switches (screw terminals)
- 8765x coaxial switches
- 8766x/8767x/8768x multiport switches
- 87104x/106x/L710xx/L720xx multiport switches
- 87406x series matrix switches
- 87204x/206x series multiport switches

- 87606x series matrix switches
- 87222x/L7222 transfer switches
- 849x series attenuators
- 8490x series attenuators
- Screw terminal connections

Ethernet connectivity enables simple connection to the network and remote access to measurements

The Ethernet interface offers highspeed connections that allow for remote access and control. You can set up a private network to filter out unwanted LAN traffic and speed up the I/O throughput, or take advantage of the remote capabilities and distribute your tests worldwide. Monitor, troubleshoot, or debug your application remotely. Ethernet communication also can be used with the support of LAN sockets connections. The optional GPIB interface has many years of proven reliability and can be used for easy integration into existing applications.

The L4445A ships with the Keysight E2094 I/O Libraries Suite making it easy for you to configure and integrate instruments into your system — even if your system includes instruments from multiple vendors.

Fully-featured graphical Web interface makes it easy to set-up and troubleshoot your tests from anywhere in the world

The built-in Web browser interface provides remote access and control of the instrument via a Java-enabled browser such as Internet Explorer. Using the Web interface, you can set up, trouble-shoot, and maintain your instrument from remote locations.

- View and modify instrument setup
- Configure switch channels and switch pairs
- Open or close switches
- Send, receive and view SCPI commands
- Define and execute switch sequences
- View error queue
- Get status reports on relay cycle counts, firmware revisions, and more

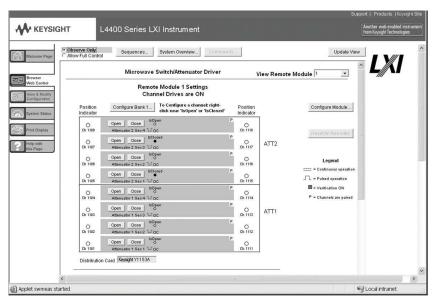


Figure 1. The Web interface makes it easy to set up, troubleshoot and maintain your test remotely

Additionally, since the Web server is built into the instrument, you can access it on any operating system that supports the Web browser without having to install any special software. Password protection and LAN lockout are also provided to limit access for additional security.


Software for most popular programming environments

Full support for standard programming environments ensures compatibility and efficiency. You can use direct I/O with the software you already have and know, or use standard IVI and

LabVIEW software drivers that provide compatibility with the most popular development environments:

- Keysight T&M Toolkit for Microsoft Visual Studio.NET and Keysight VEE Pro
- National Instruments LabVIEW, LabWindows/CVI, TestStand, and Switch Manager
- Microsoft C/C++ and Visual Basic

High-performance switching wherever your application needs it

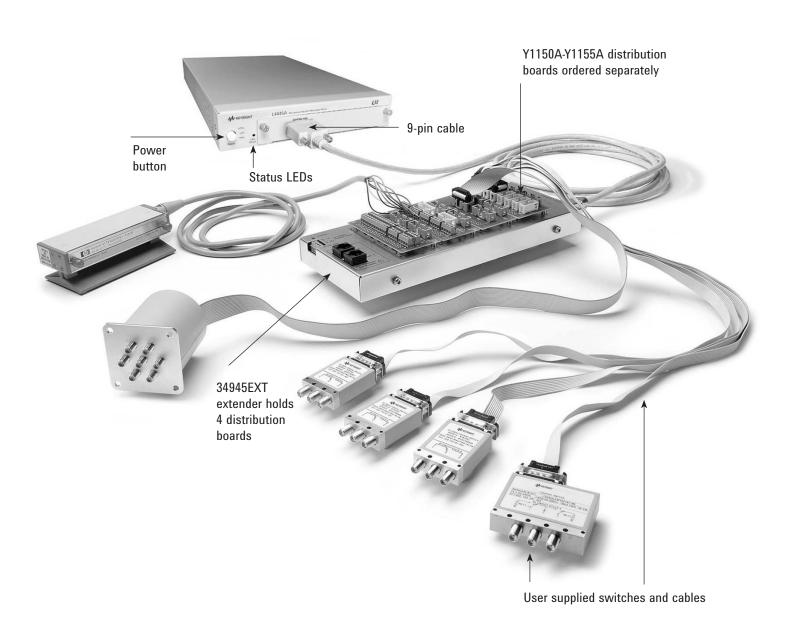

Product Specifications

| 34945EXT switch drive | | | |
|-----------------------------------|----------------------------------|--|---|
| | 64 channels, low side drive mode | Driver off voltage (max) Driver off leakage current Driver on current (max) Driver on voltage (max) | 30 V 500 uA 600 mA 0.5 V @ 600 mA |
| | 64 channels, TTL drive mode | Hi output voltage Lo output voltage Lo input current | 3 V @ lout = 2 mA 0.4 V @ lin = 20 mA 20 mA |
| 4945EXT position indicator sense | e inputs | | |
| | | Channels Lo input voltage (max) Hi input voltage (min) Input resistance | 64 0.8 V 2.5 V >100 kΩ @ Vin ≤ 5 V >20 kΩ @ Vin > 5 V |
| | | Maximum input voltage | 30 V |
| 34945EXT switch drive power supp | oly (34945EXT powered by 34945A) | | |
| | | Voltage | 24 V nominal (external power supply required for switches needing different voltag |
| | | Current | 100 mA continuous + 200 mA (15 ms pulse, 25% duty cycle) |
| 34945EXT external power connec | tion | | |
| | | Voltage range | 4.75 V to 30 V |
| | | Current limit | 2 A |
| ED indicator (Current mode divers | s) | | |
| | | Channels Supply voltage LED drive current | 64 5 V nominal 5 mA nominal (prog 1-20 mA) |
| | | Driver compliance voltage | 0.8 V |

Product Specifications (continued)

| Memory | | |
|------------------------|------------------------|--|
| Wellioty | | |
| | States | 5 instrument states with user label in non-volatile memory |
| General specifications | | |
| | Power supply | Universal 100 V to 240 V ±10% |
| | Power line frequency | 50 Hz to 60 Hz ±10% automatically sensed |
| | Power consumption | 15 VA |
| | Operating Environment | Full accuracy for 0°C to 55°C Full accuracy to 80% R.H. at 40 °C |
| | Storage environment | -40°C to 70°C |
| | Dimensions (H x W x L) | 40.9 x 212.3 x 379.3 mm 1.61 x 8.36 x 14.93 in |
| | 34945EXT dimensions | 38.1 x 114.3 x 284.5 mm 1.5 x 4.5 x 11.2 in with distribution boards installed |
| | Weight | 3.6 kg, 8.0 lbs |
| | Safety conforms to | CSA, UL/IEC/EN 61010-1 |
| | EMC conforms to | IEC/EN 61326-1, CISPR 11 |
| | Warranty | 1 year |

Product Specifications (continued)

| | Keysight connectivity | Keysight I/O Libraries Su | iite 14 or greater (E2094N) |
|---------------------|-------------------------------|---------------------------------|--|
| | software included | | |
| linimum system red | juirements | | |
| | PC hardware | Intel Pentium 100 MHz, 6 | 4 Mbyte RAM, 210 Mbyte disk spac |
| | | Display 800x600, 256 col | ors, CD-ROM drive |
| | Operating system ¹ | Windows 98 SE/NT/200 | 0/XP |
| omputer interfaces | | | |
| | | Standard LAN 10BaseT/ | 100BaseTx |
| | | Optional IEEE 488.2 GPIE | } |
| | ., | | |
| oftware driver supp | ort for programming langua | | |
| | Software drivers | IVI-C and IVI-COM for W | indows NT/2000/XP |
| | | LabVIEW | |
| | Compatible with program | ıming tools and environment | s |
| | | Keysight | VEE Pro |
| | | | T&M Toolkit (reqs Visual Studio.NET) |
| | | | (Teys visual Studio.IVET) |
| | | National Instruments | TestStand |
| | | National Instruments | |
| | | National Instruments | TestStand |
| | | National Instruments | TestStand Measurement Studio |
| | | National Instruments | TestStand Measurement Studio LabWindows/CVI |
| | | National Instruments Microsoft | TestStand Measurement Studio LabWindows/CVI LabVIEW |
| | | | TestStand Measurement Studio LabWindows/CVI LabVIEW Switch Executive |

Ordering information

Example configuration:

A test system is being built that requires the following Microwave Switching:

- (qty 2) Keysight 87206B SP6T Switches
- (qty 8) Keysight N1810UL SPDT Switches

Select the quantity of distribution boards for the required switches using the ordering info below:

- Oty 2 Y1152A Distribution boards to control qty 2 87206B switches
- Oty 1 Y1150A Distribution board to control qty 8 N1810UL switches.

Notice that each Y1152A can also drive two N181x switches. Therefore if you only needed to drive 4 N1810 switches, then you could have controlled those switches via the Y1152A distribution boards already selected.

Here is the final recommended configuration:

- (qty 2) 87206B DC-20 GHz
 SP6T Switches
- (qty 8) N1810UL DC-20 GHz SPDT Switches
- (qty 1) L4445A
 Switch/Attenuator Driver
 (when ordering the L4445A,
 the 34945EXT is automatically
 added for controlling switches)
- (qty 2) Y1152ADistribution Boards
- (qty1) Y1150ADistribution Board
- Either build own cables using off-the-shelf parts, or order qty 1 Y1159A 16-to-16 pin connect kit (supplies for 2 cables) and qty 2 Y1157A 9-to-10 pin cable kit (supplies for 4 cables)

We recommend that the switch be ordered with options for 24 V coils, position indicators, and socket connectors. Since 24 V latching relays are specified, there is no need for an external power supply. The L4445A instrument can provide power for a single 34945EXT. Easy-to-build ribbon cables can be built to interface each of the switches to the Y1150A and Y1152A distribution boards. See the Application note: Configuring an RF/Microwave Switch System (5989-2272EN) for additional configuration details.

L4445A Microwave Switch/ Attenuator driver

Includes User's guide on CD, test report, power cord, and Quick Start package

Option -GPIB

Adds GPIB interface

Option 0B0

Deletes printed manual set, full documentation included on CD ROM

Option ABA

English printed manual set

L4445A Accessories

Distribution boards are required for control of external switches. One 34945EXT external driver required for each 64 coils — holds 4 distribution boards per 34945EXT extender

Y1150A

34945EXT distribution board for 8 N181x SPDT switches

Y1151A

34945EXT distribution board for two 87104x/106x multiport or 87406B matrix switches

Y1152A

34945EXT distribution board for one 87204x/206x or 87606B switch and two N181x switches

Y1153A

34945EXT distribution board for two 84904/5/6/7/8 or 8494/5/6 step attenuators

Y1154A

34945EXT distribution board for two 87222 transfer switches and six N181x SPDT switches

Y1155A

34945A distribution board w/ generic screw terminals for driving 16 switch coils

Cable kits for connecting switches to distribution boards:

Y1157A

9-to-10 pin cable kit for Y1150A, Y1152A, Y1154A - supplies to build 4 cables

Y1158A

10-to-10/10-to-14 pin cable kit for Y1153A, Y1154A - supplies to build 2 cables

Y1159A

16-to-16 pin cable kit for 1150A/51A/52A/53A/54A/55A supplies to build 2 cables

Other accessories

Y1160A

Rack mount kit for L4400 series instruments racks 2 instruments side-by-side with sliding tray

For additional information please visit: http://www.keysight.com/find/L44454

Related Keysight Literature

Data Sheets

5988-6302EN - Keysight VEE Pro 5989-1441EN - Keysight W1140A-TKT T&M Toolkit 2.0 with Test Automation 5989-1439EN - Keysight E2094N I/O Libraries Suite 14

5989-2272EN - Configuring an RF/Microwave Switch System

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.axiestandard.org



AdvancedTCA[®] Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium.

www.lxistandard.org



LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.

www.pxisa.org



PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Three-Year Warranty



www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

Keysight Assurance Plans



www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements

www.keysight.com/quality



Keysight Electronic Measurement Group DEKRA Certified ISO 9001:2008 Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

| Canada | (877) 894 4414 |
|---------------|------------------|
| Brazil | 55 11 3351 7010 |
| Mexico | 001 800 254 2440 |
| United States | (800) 829 4444 |

Asia Pacific

| Australia | 1 800 629 485 |
|--------------------|----------------|
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 112 929 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 6375 8100 |

Europe & Middle East

| | 0800 001122 |
|---|---------------|
| | 0800 58580 |
| | 0800 523252 |
| | 0805 980333 |
| | 0800 6270999 |
| | 1800 832700 |
| | 1 809 343051 |
| | 800 599100 |
| | +32 800 58580 |
| | 0800 0233200 |
| € | 8800 5009286 |
| | 0800 000154 |
| | 0200 882255 |
| | 0800 805353 |
| | Opt. 1 (DE) |
| | Opt. 2 (FR) |
| | Opt. 3 (IT) |
| | € |

For other unlisted countries: www.keysight.com/find/contactus (BP-05-29-14)

0800 0260637

United Kingdom

