

Keysight Technologies

CXA X-Series Signal Analyzer

N9000A

9 kHz to 3.0, 7.5, 13.6, or 26.5 GHz

Data Sheet

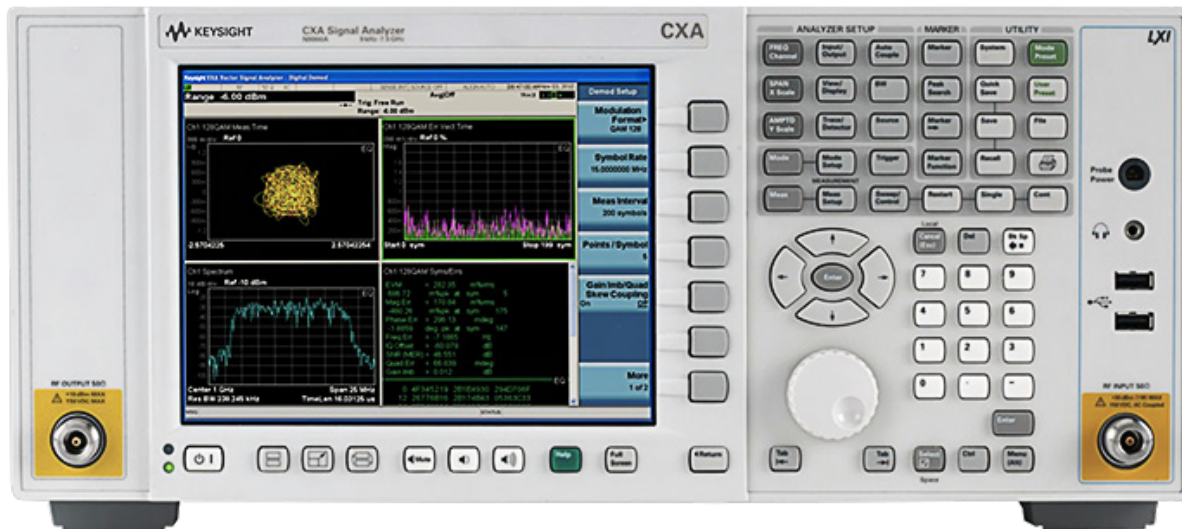


Table of Contents

Definitions and Conditions	3
Frequency and Time Specifications	4
Amplitude Accuracy and Range Specifications.....	6
Dynamic Range Specifications.....	8
PowerSuite Measurement Specifications	12
Tracking Generator Specifications	13
75 Ω Input Specifications	14
General Specifications.....	15
Inputs and Outputs.....	16
I/Q Analyzer	18
Related Literature.....	18

Leading low-cost tool

The CXA is today's leading low-cost tool for essential signal characterization. Its capabilities provide a solid foundation for cost-effective testing in general-purpose and educational applications.

This data sheet is a summary of the specifications and conditions for CXA signal analyzers. For the complete specifications guide, visit www.keysight.com/find/cxa_specifications

Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to temperature ranges 0 to 55 °C¹, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2σ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

The analyzer will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy
- The analyzer has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on; if it had previously been stored at a temperature range inside the allowed storage range, but outside the allowed operating range
- The analyzer has been turned on at least 30 minutes with Auto Align set to Normal, or, if Auto Align is set to Off or Partial, alignments must have been run recently enough to prevent an Alert message. If the Alert condition is changed from "Time and Temperature" to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user. If Auto Align is set to Light, performance is not warranted, and nominal performance will degrade to become a factor of 1.4 wider for any specification subject to alignment, such as amplitude tolerances.

For ordering information, refer to the CXA Signal Analyzer Configuration Guide (5990-4341EN).

1. For earlier instruments (Serial number prefix < MY/SG/US5423), the full temperature ranges from 5 to 50 °C.

For more information

This CXA signal analyzer data sheet is a summary of the complete specifications and conditions for N9000A CXA signal analyzers, which are available in the CXA Signal Analyzer Specification Guide. The CXA Signal Analyzer Specification Guide can be obtained on the web at:

www.keysight.com/find/cxa_specifications

Frequency and Time Specifications

Frequency range	DC coupled	AC coupled	
Option 503	NA	9 kHz to 3.0 GHz	
Option 507	NA	9 kHz to 7.5 GHz	
Option 513	9 kHz to 13.6 GHz	10 MHz to 13.6 GHz	
Option 526	9 kHz to 26.5 GHz	10 MHz to 26.5 GHz	
	Band	LO multiple (N)	AC coupled
RF (Option 503, 507)	0	1	9 kHz to 3.0 GHz
	1	1	2.95 to 3.80 GHz
	2	1	3.70 to 4.55 GHz
	3	1	4.45 to 5.30 GHz
	4	1	5.20 to 6.05 GHz
	5	1	5.95 to 6.80 GHz
	6	1	6.70 to 7.50 GHz
	Band	LO multiple (N)	AC coupled
MW (Option 513, 526)	0	1	9 kHz to 3.08 GHz
	1	2	2.95 to 7.58 GHz
	2	2	7.45 to 9.55 GHz
	3	2	9.45 to 12.60 GHz
	4	2	12.50 to 13.05 GHz
	4	4	12.95 to 13.80 GHz
	5	4	13.40 to 15.55 GHz
	6	4	15.45 to 19.35 GHz
	7	4	19.25 to 21.05 GHz
	8	4	20.95 to 22.85 GHz
	9	4	22.75 to 24.25 GHz
10	4	24.15 to 26.55 GHz	
Frequency reference			
Accuracy	$\pm [(time\ since\ last\ adjustment\ \times\ aging\ rate) + temperature\ stability + calibration\ accuracy]$		
Aging rate	Option PFR $\pm 1 \times 10^{-7}$ / year $\pm 1.5 \times 10^{-7}$ / 2 years	Standard $\pm 1 \times 10^{-6}$ / year	
Temperature stability	Option PFR $\pm 1.5 \times 10^{-8}$	Standard $\pm 2 \times 10^{-6}$	
20 to 30 °C			
Full temperature range	$\pm 5 \times 10^{-8}$	$\pm 2 \times 10^{-6}$	
Achievable initial calibration accuracy	Option PFR $\pm 4 \times 10^{-8}$	Standard $\pm 1.4 \times 10^{-6}$	
Example frequency reference accuracy (with Option PFR)	$= \pm (1 \times 1 \times 10^{-7} + 5 \times 10^{-8} + 4 \times 10^{-8})$		
1 year after last adjustment	$= \pm 1.9 \times 10^{-7}$		
Residual FM			
Option PFR	≤ 0.25 Hz p-p in 20 ms nominal		
Standard	≤ 10 Hz p-p in 20 ms nominal		
Frequency readout accuracy (start, stop, center, marker)			
$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.25 \% \times \text{span} + 5 \% \times \text{RBW} + 2 \text{ Hz} + 0.5 \times \text{horizontal resolution}^1)$			
Marker frequency counter			
Accuracy	$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.100 \text{ Hz})$		
Delta counter accuracy	$\pm (\text{delta frequency} \times \text{frequency reference accuracy} + 0.141 \text{ Hz})$		
Counter resolution	0.001 Hz		

1. Horizontal resolution is span/(sweep points - 1).

Frequency and Time Specifications (continued)

Frequency span (FFT and swept mode)		
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument	
Resolution	2 Hz	
Accuracy		
Swept	± (0.25 % x span + horizontal resolution)	
FFT	± (0.10 % x span + horizontal resolution)	
Sweep time and triggering		
Range	Span = 0 Hz	1 µs to 6000 s
	Span ≥ 10 Hz	1 ms to 4000 s
Accuracy	Span ≥ 10 Hz, swept	± 0.01 % nominal
	Span ≥ 10 Hz, FFT	± 40 % nominal
	Span = 0 Hz	± 1 % nominal
Trigger	Free run, line, video, external 1, RF burst, periodic timer	
Trigger delay	Span = 0 Hz or FFT	-150 to +500 ms
	Span ≥ 10 Hz, swept	1 µs to 500 ms
	Resolution	0.1 µs
Time gating		
Gate methods	Gated LO; gated video; gated FFT	
Gate length range (except method = FFT)	100.0 ns to 5.0 s	
Gate delay range	0 to 100.0 s	
Gate delay jitter	33.3 ns p-p nominal	
Sweep (trace) point range		
All spans	1 to 40001	
Resolution bandwidth (RBW)		
Range (-3.01 dB bandwidth)	1 Hz to 3 MHz (10 % steps), 4, 5, 6, 8 MHz	
Bandwidth accuracy (power)	1 Hz to 750 kHz	± 1.0 % (± 0.044 dB) nominal
	820 kHz to 1.2 MHz (< 3 GHz CF)	± 2.0 % (± 0.088 dB) nominal
	1.3 to 2.0 MHz (< 3 GHz CF)	± 0.07 dB nominal
	2.2 to 3 MHz (< 3 GHz CF)	± 0.15 dB nominal
	4 to 8 MHz (< 3 GHz CF)	± 0.25 dB nominal
Bandwidth accuracy (-3.01 dB)	1 Hz to 1.3 MHz	± 2 % nominal
RBW range		
Selectivity (-60 dB/-3 dB)	4.1:1 nominal	
EMI bandwidth (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz	(Option EMC or W6141A required)
EMI bandwidth (MIL STD 461E compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz	(Option EMC or W6141A required)
Analysis bandwidth ¹		
Maximum bandwidth	Option B25	25 MHz
	Standard	10 MHz
Video bandwidth (VBW)		
Range	1 Hz to 3 MHz (10 % steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)	
Accuracy	± 6 % nominal	
Measurement speed ²		
Local measurement and display update rate	11 ms (90/s) nominal	
Remote measurement and LAN transfer rate	6 ms (167/s) nominal	
Marker peak search	5 ms nominal	
Center frequency tune and transfer	22 ms nominal	
Measurement/mode switching	75 ms nominal	

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.
2. Sweep points = 101.

Amplitude Accuracy and Range Specifications

Amplitude range			
Measurement range			
RF (Option 503, 507)	Preamp off	100 kHz to 1 MHz	Displayed average noise level (DANL) to +20 dBm
		1 MHz to 7.5 GHz	Displayed average noise level (DANL) to +23 dBm
MW (Option 513/526)	Preamp on	100 kHz to 7.5 GHz	Displayed average noise level (DANL) to +15 dBm
	Preamp off	100 kHz to 26.5 GHz	Displayed average noise level (DANL) to +23 dBm
	Preamp on	100 kHz to 26.5 GHz	Displayed average noise level (DANL) to +23 dBm
Input attenuator range			
RF (Option 503, 507)	Standard	0 to 50 dB in 10 dB steps	
	Option FSA	0 to 50 dB in 2 dB steps	
MW (Option 513, 526)	Standard	0 to 70 dB in 10 dB steps	
	Option FSA	0 to 70 dB in 2 dB steps	
Maximum safe input level			
Average total power			
RF (Option 503, 507)	+30 dBm (1 W)	Input attenuation \geq 20 dB, preamp off	
	10 dBm (10 mW)	Input attenuation \geq 20 dB, preamp on	
MW (Option 513, 526)	+30 dBm (1 W)	Input attenuation \geq 10 dB, preamp off	
	+30 dBm (1 W)	Input attenuation \geq 20 dB, preamp on	
Peak pulse power			
	+50 dBm (100 W)	< 10 μ s pulse width, < 1 % duty cycle, input attenuation \geq 30 dB	
DC volts			
RF (Option 503, 507)	AC coupled	\pm 50 Vdc	
MW (Option 513, 526)	AC coupled	\pm 50 Vdc	
	DC coupled	\pm 0.2 Vdc	
Display range			
Log scale	0.1 to 1 dB/division in 0.1 dB steps		
	1 to 20 dB/division in 1 dB steps (10 display divisions)		
Linear scale	10 divisions		
Scale units	dBm, dBmV, dB μ V, dBmA, dB μ A, V, W, A		
Frequency response		Specification	95th percentile ($\approx 2\sigma$)
(10 dB input attenuation, 20 to 30 °C, σ = nominal standard deviation)			
RF (Option 503, 507)	9 kHz to 10 MHz	\pm 0.60 dB	\pm 0.45 dB
	10 MHz to 3 GHz	\pm 0.75 dB	\pm 0.55 dB
	3 to 5.25 GHz	\pm 1.45 dB	\pm 1.00 dB
	5.25 to 7.5 GHz	\pm 1.65 dB	\pm 1.20 dB
MW (Option 513, 526)	9 kHz to 10 MHz	\pm 0.8 dB	\pm 0.5 dB
	10 MHz to 3 GHz	\pm 0.65 dB	\pm 0.4 dB
	3 to 7.5 GHz	\pm 1.5 dB	\pm 0.5 dB
	7.5 to 13.6 GHz	\pm 2.0 dB	\pm 0.8 dB
	13.6 to 19 GHz	\pm 2.0 dB	\pm 1.0 dB
	19 to 26.5 GHz	\pm 2.5 dB	\pm 1.3 dB
Preamp on			
RF (Option 503, 507) (P03, P07)	100 kHz to 3 GHz	\pm 0.70 dB	
	3 to 5.25 GHz	\pm 0.85 dB	
	5.25 to 7.5 GHz	\pm 1.35 dB	
MW (Option 513, 526) (P03, P07, P13, P26)	100 kHz to 3 GHz	\pm 0.7 dB	
	3 to 13.6 GHz	\pm 1.0 dB	
	13.6 to 19 GHz	\pm 1.1 dB	
	19 to 26.5 GHz	\pm 2.5 dB	

Amplitude Accuracy and Range Specifications (continued)

Input attenuation switching uncertainty		Specifications	Additional information
Attenuation > 2 dB, preamp off	50 MHz (reference frequency)	± 0.32 dB	± 0.15 dB typical
Relative to 10 dB (reference setting)	100 kHz to 3.0 GHz		± 0.30 dB nominal
	3.0 to 7.5 GHz		± 0.50 dB nominal
	7.5 to 26.5 GHz		± 0.70 dB nominal
Total absolute amplitude accuracy			
(10 dB attenuation, 20 to 30 °C, 1 Hz ≤ RBW ≤ 1 MHz, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation)			
	At 50 MHz	± 0.40 dB	
	At all frequencies	± (0.40 dB + frequency response)	
	100 kHz to 10 MHz	± 0.60 dB (95th Percentile ≈ 2σ)	
	10 MHz to 2.0 GHz	± 0.50 dB (95th Percentile ≈ 2σ)	
	2.0 to 3.0 GHz	± 0.60 dB (95th Percentile ≈ 2σ)	
Preamp on (Option P03/P07/P13/P26)			± (0.39 dB + frequency response) nominal
Input voltage standing wave ratio (VSWR) (≥ 10 dB attenuation)			
		Option 503, 507	Option 513, 526
	10 MHz to 3 GHz	< 1.5 nominal	< 1.3 nominal
	3 to 7.5 GHz	< 2.0 nominal	< 1.4 nominal
	7.5 to 26.5 GHz	N/A	< 1.9 nominal
Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)			
	1 Hz to 3 MHz RBW	± 0.15 dB	
	4, 5, 6, 8 MHz RBW	± 1.0 dB	
Reference level			
Range			
Log scale		-170 to +23 dBm in 0.01 dB steps	
Linear scale		Same as log (707 pV to 3.16 V)	
Accuracy		0 dB	
Display scale switching uncertainty			
Switching between linear and log		0 dB	
Log scale/div switching		0 dB	
Display scale fidelity			
-80 dBm ≤ input mixer level < -15 dBm		± 0.15 dB total	
-15 dBm ≤ input mixer level < -10 dBm		± 0.30 dB	± 0.15 dB typical
Trace detectors			
Normal, peak, sample, negative peak, log power average, RMS average, and voltage average			
Preamplifier (Option P03/P07/P13/P26)			
Frequency range	Option P03	100 kHz to 3.0 GHz	
	Option P07	100 kHz to 7.5 GHz	
	Option P13	100 kHz to 13.6 GHz	
	Option P26	100 kHz to 26.5 GHz	
Gain	100 kHz to 26.5 GHz	+20 dB nominal	
Noise figure	100 kHz to 26.5 GHz	DANL + 176.24 dB nominal	

Dynamic Range Specifications

		1 dB gain compression (two-tone)		Total power at input mixer		
RF (Option 503, 507)	Preamp off	50 MHz to 7.5 GHz	+2 dBm nominal			
	Preamp on (Option P03/P07)	50 MHz to 7.5 GHz	-19 dBm nominal			
MW (Option 513/526)	Preamp off	50 MHz to 7.5 GHz	+7 dBm nominal			
		7.5 to 13.6 GHz	+3 dBm nominal			
		13.6 to 26.5 GHz	+0 dBm nominal			
	Preamp on	50 MHz to 26.5 GHz	-19 dBm nominal			
Displayed average noise level (DANL)						
(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)						
Parentheses indicate typical performance						
		Preamplifier OFF		Preamplifier ON		
RF (Option 503/507) ¹	9 kHz to 1 MHz	(-120) dBm	(-139) dBm, 100 kHz to 1 MHz			
	1 to 10 MHz	-130 (-137) dBm	-149 (-157) dBm			
	10 MHz to 1.5 GHz	-148 (-150) dBm	-161 (-163) dBm			
	1.5 to 2.2 GHz	-144 (-147) dBm	-160 (-163) dBm			
	2.2 to 2.5 GHz	-144 (-147) dBm	-158 (-161) dBm			
	2.5 to 2.7 GHz	-142 (-145) dBm	-158 (-161) dBm			
	2.7 to 3.0 GHz	-139 (-143) dBm	-158 (-161) dBm			
	3 to 4.5 GHz	-137 (-140) dBm	-155 (-159) dBm			
	4.5 to 6 GHz	-133 (-136) dBm	-152 (-156) dBm			
	6 to 7.5 GHz	-128 (-131) dBm	-148 (-152) dBm			
	MW (Option 513/526)	1 to 10 MHz	-143 (-148) dBm	-153 (-158) dBm		
10 MHz to 1.5 GHz		-147 (-150) dBm	-160 (-163) dBm			
1.5 to 6 GHz		-143 (-147) dBm	-158 (-161) dBm			
6 to 7.5 GHz		-141 (-145) dBm	-155 (-160) dBm			
7.5 to 13.6 GHz		-139 (-142) dBm	-155 (-160) dBm			
13.6 to 20 GHz		-134 (-140) dBm	-153 (-157) dBm			
20 to 24 GHz		-132 (-138) dBm	-151 (-155) dBm			
24 to 26.5 GHz	-124 (-129) dBm	-142 (-147) dBm				
Spurious responses						
RF (Option 503, 507)	Residual responses (Input terminated and 0 dB attenuation, 20 to 30 °C)	200 kHz to 7.5 GHz (swept) Zero span or FFT or other frequencies	-90 dBm -100 dBm nominal			
	Input related spurious	10 MHz to 7.5 GHz	-60 dBc typical			
	MW (Option 513, 526)		Tuned frequency (f)	Mixer level	Response	
Image responses		10 MHz to 26.5 GHz	-10 dBm	-60 dBc typical		
LO-related spurious		10 MHz to 3 GHz	-10 dBm	-64 dBc typical		
Other spurious responses						
First RF order (f ≥ 10 MHz from carrier)			-10 dBm	-65 dBc		
High RF order (f ≥ 10 MHz from carrier)			-30 dBm	-65 dBc		
Second harmonic distortion (SHI)						
	Source frequency	SHI (nominal)				
RF/MW (Option 503, 507, 513, 526)	10 MHz to 3.75 GHz	+42 dBm				
MW (Option 513, 526)	3.75 to 13.25 GHz	+54 dBm				

1. Applies for instruments with serial number prefix ≥ MY/SG/US5423. Those instruments ship standard with N9000A-EP4 as the identifier. For earlier instruments, refer to the CXA specifications guide.

Dynamic Range Specifications (continued)

Third-order intermodulation distortion (TOI)			
Parentheses indicate typical performance			
RF (Option 503, 507)	Preamp off (Two -20 dBm tones at input mixer spaced by 100 kHz, 0 dB attenuation, 20 to 30 °C)	10 to 400 MHz	+10 (+14) dBm
		400 MHz to 3 GHz	+13 (+17) dBm
		3 to 7.5 GHz	+13 (+15) dBm
MW (Option 513/526)	Preamp off (Two -20 dBm tones at input mixer spaced by 100 kHz, 0 dB attenuation, 20 to 30 °C)	10 to 500 MHz	+11 dBm, (+15) dBm
		500 MHz to 2 GHz	+12 dBm, (+15) dBm
		2 to 3 GHz	+11 dBm, (+15) dBm
		3 to 7.5 GHz	+12 dBm, (+17) dBm
		7.5 to 13.6 GHz	+11 dBm, (+15) dBm
		13.6 to 26.5 GHz	+10 dBm, (+14) dBm
Option P03/P07/P13/ P26	Preamp on (Two -45 dBm tones at the preamp input, spaced by 100 kHz, 0 dB attenuation, 20 to 30 °C)	10 MHz to 26.5 GHz	-8 dBm nominal

Phase noise ¹	Offset	Specification	Typical
Noise sidebands (20 to 30 °C, CF = 1 GHz)			
	1 kHz	-98 dBc/Hz	-103 dBc/Hz
	10 kHz	-102 dBc/Hz	-110 dBc/Hz
	100 kHz	-108 dBc/Hz	-110 dBc/Hz
	1 MHz	-130 dBc/Hz	-130 dBc/Hz
	10 MHz		-145 dBc/Hz nominal

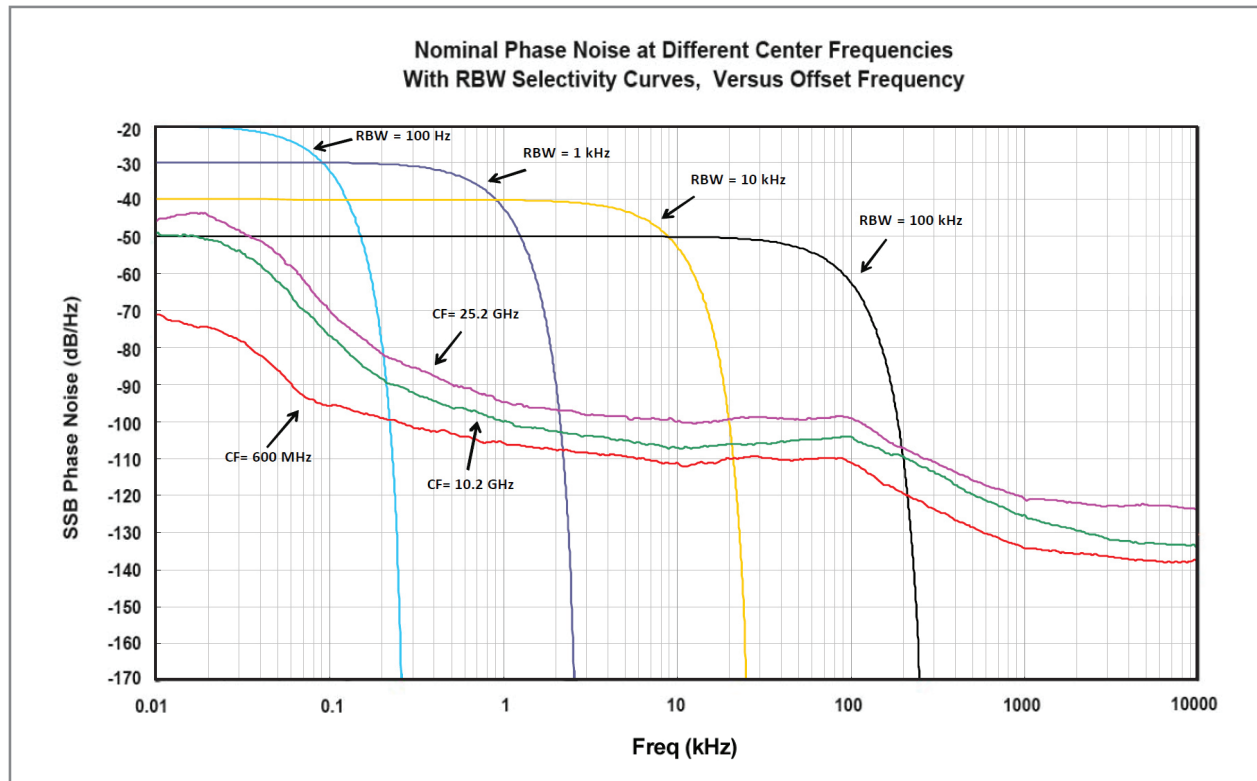


Figure 1. Nominal phase noise at different center frequencies

1. Applies for RF CXA with serial number prefix ≥ MY/SG/US5423 and MW CXA. Those instruments ship standard with N9000A-EP4 as the identifier. For nominal values at other center frequencies, refer to Figure 1. For earlier instruments, refer to the CXA specifications guide.

PowerSuite Measurement Specifications

Channel power			
Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB)		± 1.33 dB (± 0.61 dB 95th percentile)	
Occupied bandwidth			
Frequency accuracy		± [span/1000] nominal	
Adjacent channel power			
Accuracy, W-CDMA (ACLR) (at specific mixer levels and ACLR ranges)		Adjacent	Alternate
MS		± 0.76 dB	± 0.73 dB
BTS		± 1.72 dB	± 1.96 dB
Dynamic range (typical)			
RF (Option 503, 507) ¹	Without noise correction	-63 dB	-67 dB
	With noise correction	-73 dB	-78 dB
MW (Option 513, 526)	Without noise correction	-66 dB	-69 dB
	With noise correction	-73 dB	-78 dB
Offset channel pairs measured		1 to 6	
Power statistics CCDF			
Histogram resolution		0.01 dB	
Harmonic distortion			
Maximum harmonic number		10th	
Results		Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %	
Intermod (TOI)			
		Measure the third-order products and intercepts from two tones	
Burst power			
Methods		Power above threshold, power within burst width	
Results		Single burst output power, average output power, maximum power, minimum power within burst, burst width	
Spurious emission			
W-CDMA (1 to 2.7 GHz) table-driven spurious signals; search across regions			
Dynamic range (RBW=1 MHz)	70.7 dB	(75.9 dB typical)	
Absolute sensitivity (RBW=1 MHz)	-76.5 dBm	(-82.5 dBm typical)	
Spectrum emission mask (SEM)			
cdma2000® (750 kHz offset)			
Relative dynamic range (30 kHz RBW)	67.4 dB	(72.7 dB typical)	
Absolute sensitivity	-93.7 dBm	(-99.7 dBm typical)	
Relative accuracy	± 0.11 dB		
3GPP W-CDMA (2.515 MHz offset)			
Relative dynamic range (30 kHz RBW)	73.4 dB	(80.2 dB typical)	
Absolute sensitivity	-91.7 dBm	(-97.7 dBm typical)	
Relative accuracy	± 0.11 dB		

1. Applies for RF CXA with serial number prefix ≥ MY/SG/US5423. Those instruments ship standard with N9000A-EP4 as the identifier. For earlier instruments, refer to the CXA specifications guide.

Tracking Generator Specifications

Output frequency		
Frequency range		
Option T03 ¹	9 kHz to 3 GHz	
Option T06 ¹	9 kHz to 6 GHz	
Resolution	1 Hz	
Output power level		
Range	-50 to 0 dBm	
Resolution	0.1 dB	
Absolute accuracy (at 50 MHz, -10 dBm, 20 to 30 °C)	± 0.55 dB	
Output flatness (referenced to 50 MHz, -10 dBm, 20 to 30 °C)	Specification	95th percentile ($\approx 2\sigma$)
9 kHz to 100 kHz	± 1.5 dB	± 1.2 dB
100 kHz to 3.0 GHz	± 1.2 dB	± 0.8 dB
3.0 GHz to 6.0 GHz	± 1.5 dB	± 1.2 dB
Level accuracy		
9 kHz to 100 kHz	± 1.0 dB nominal	
100 kHz to 3.0 GHz	± 0.5 dB nominal	
3.0 GHz to 6.0 GHz	± 0.8 dB nominal	
Output power sweep		
Range	-50 to 0 dBm	
Resolution	0.1 dB	
Maximum safe reverse level		
Average total power	+30 dBm (1 W)	
AC coupled	± 50 Vdc	
Phase noise²		
Noise sidebands (CF = 1 GHz)	Offset	
	10 kHz	-102 dBc/Hz nominal
	100 kHz	-104 dBc/Hz nominal
	1 MHz	-117 dBc/Hz nominal
Spurious outputs (0 dBm output)		
Harmonic spurs		
100 kHz to 3 GHz	< -35 dBc	
3 GHz to 6 GHz	< -30 dBc	
Non-harmonic spurs		
9 kHz to 10 MHz	< -35 dBc nominal	
10 MHz to 6 GHz	< -35 dBc	
Dynamic range		
	Maximum output power – displayed average noise level	110 dBc nominal
Output VSWR		
9 kHz to 6 GHz	< 1.5:1 nominal	

1. Not available on microwave CXA (Option 513 or 526).

2. Applies for instruments with serial number prefix \geq MY/SG/US5423. Those instruments ship standard with N9000A-EP4 as the identifier. For earlier instruments, refer to the CXA specifications guide.

75 Ω Input Specifications

Frequency range		
Option C75 ¹	1 MHz to 1.5 GHz	
Maximum safe input level		
Average continuous power or peak pulse power	+72.5 dBmV (0.25 W) +63 dBmV (25 mW)	Input attenuation \geq 20 dB, preamp off Input attenuation \geq 20 dB, preamp on (Option P03/P07)
AC coupled	\pm 50 Vdc	
Frequency response (10 dB input attenuation)		
Preamp off	1 MHz to 10 MHz 10 MHz to 1.5 GHz	\pm 0.6 dB nominal \pm 0.75 dB nominal
1 dB gain compression (two-tone)		Total power at input mixer
Preamp off	50 MHz to 1.5 GHz	+57 dBmV nominal
Preamp on (Option P03/P07)	50 MHz to 1.5 GHz	+35 dBmV nominal
Displayed average noise level (DANL) (Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, nominal)		
Preamp off	1 to 10 MHz 10 MHz to 1.5 GHz	-89 dBmV -97 dBmV
Preamp on (Option P03/P07)	1 to 10 MHz 10 MHz to 1.5 GHz	-108 dBmV -113 dBmV
Second harmonic distortion (SHI)		
Preamp off (Input level +28.75 dBmV, input attenuation 10 dB)	10 to 750 MHz	+95 dBmV nominal
Preamp on (Option P03/P07) (Input level +8.75 dBmV, input attenuation 10 dB)	10 to 750 MHz	+63 dBmV nominal
Third-order intermodulation distortion (TOI)		
Preamp off (Two +28.75 dBmV tones at input mixer spaced by 100 kHz, 0 dB attenuation)	10 MHz to 1.5 GHz	+62 dBmV nominal
Preamp on (Option P03/P07) (Two +3.75 dBmV tones at input mixer spaced by 100 kHz, 0 dB attenuation)	10 MHz to 1.5 GHz	+40 dBmV nominal
Input voltage standing wave ratio (VSWR)		
Preamp off (10 dB attenuation)	1 MHz to 1.5 GHz	< 1.4:1 nominal
Preamp on (Option P03/P07) (0 dB attenuation)	1 MHz to 1.5 GHz	< 1.4:1 nominal

1. Not available on microwave CXA (Option 513 or 526).

General Specifications

Temperature range

Operating	0 to 55 °C
Storage	-40 to 70 °C

EMC

- Complies with European EMC Directive 2004/108/EC
- IEC/EN 61326-1 or IEC/EN 61326-2-1
 - CISPR Pub 11 Group 1, class A
 - AS/NZS CISPR 11:2002
 - ICES/NMB-001

This ISM device complies with Canadian ICES-001

Cet appareil ISM est conforme à la norme NMB-001 du Canada

Safety

- Complies with European Low Voltage Directive 73/23/EEC, amended by 93/68/EEC
- IEC/EN 61010-1 2nd Edition
 - Canada: CSA C22.2 No. 61010-1
 - USA: UL 61010-1 2nd Edition

Audio noise

Acoustic noise emission	Geraeuschemission
LpA < 70 dB	LpA < 70 dB
Operator position	Am Arbeitsplatz
Normal position	Normaler Betrieb
Per ISO 7779	Nach DIN 45635 t.19

Environmental stress

Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.

Power requirements

Voltage and frequency (nominal)	100 to 120 V, 50/60/400 Hz
	220 to 240 V, 50/60 Hz

Power consumption	
On	270 W maximum
Standby	20 W

Display

Resolution	1024 x 768, XGA
Size	213 mm (8.4 in.) diagonal (nominal)

Data storage

Internal	80 GB nominal (removable solid state drive)
External	Supports USB 2.0 compatible memory devices

Weight (without options)

Net	15.4 kg (34.0 lbs)
Shipping	27.4 kg (60.4 lbs)

Dimensions

Height	177 mm (7.0 in)
Width	426 mm (16.8 in)
Length	368 mm (14.5 in)

Warranty

The CXA signal analyzer is supplied with a 3-year warranty

Calibration cycle

The recommended calibration cycle is one year; calibration services are available through Keysight service centers

Inputs and Outputs

Front panel	
RF input	
Connector	Type-N female, 50 Ω nominal
RF input (Option C75)	
Connector	Type-N female, 75 Ω nominal
RF output (Option T03 or T06)	
Connector	Type-N female, 50 Ω nominal
Probe power	
Voltage/current	+15 Vdc, $\pm 7\%$ at 150 mA max. nominal -12.6 Vdc, $\pm 10\%$ at 150 mA max. nominal
USB 2.0 ports	
Master (2 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A nominal
Rear panel	
10 MHz out	
Connector	BNC female, 50 Ω nominal
Output amplitude	≥ 0 dBm nominal
Frequency	10 MHz \pm (10 MHz x frequency reference accuracy)
Ext Ref In	
Connector	BNC female, 50 Ω nominal
Input amplitude range	-5 to 10 dBm nominal
Input frequency	10 MHz \pm nominal
Frequency lock range	$\pm 5 \times 10^{-6}$ of specified external reference input frequency
Trigger 1 input	
Connector	BNC female
Impedance	> 10 k Ω nominal
Trigger level range	-5 to 5 V
Trigger 1 output	
Connector	BNC female
Impedance	50 Ω nominal
Level	5 V TTL nominal
Monitor output	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
Resolution	1024 x 768
Noise source drive +28 V (pulsed)	
Connector	BNC female
SNS Series noise source	
Analog out	
Connector	BNC female
USB 2.0 ports	
Master (4 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A nominal
Slave (1 port)	
Standard	Compatible with USB 2.0
Connector	USB Type-B female
Output current	0.5 A nominal
GPIO interface	
Connector	IEEE-488 bus connector
GPIO codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0
GPIO mode	Controller or device

Inputs and Outputs (continued)

Rear panel (continued)

LAN TCP/IP interface	
Standard	1000Base-T
Connector	RJ45 Ethertwist
Sync (reserved for future use)	
Connector	BNC female
IF output	
Connector	SMA female
Impedance	50 Ω nominal

Wideband IF output, Option CR3¹

Center frequency	
SA mode or I/Q analyzer	322.5 MHz
Conversion gain	
	-4 to +7 dB (nominal) plus RF frequency response
Bandwidth	
Low band	Up to 120 MHz (nominal)
High band	Up to 40 MHz (nominal)

1. Not available on microwave CXA (Option 513 or 526).

I/Q Analyzer

Frequency			
Frequency span			
Standard instrument	10 Hz to 10 MHz		
Option B25	10 Hz to 25 MHz		
Resolution bandwidth (spectrum measurement)			
Range			
Overall	100 mHz to 3 MHz		
Span = 1 MHz	50 Hz to 1 MHz		
Span = 10 kHz	1 Hz to 10 kHz		
Span = 100 Hz	100 mHz to 100 Hz		
Window shapes			
Flat top, Uniform, Hanning, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)			
Analysis bandwidth			
Standard instrument	10 Hz to 10 MHz		
Option B25	10 Hz to 25 MHz		
IF frequency response (standard 10 MHz IF path)			
IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)			
Center frequency (GHz)	Span (MHz)	Max. error	RMS (nominal)
≤ 3.0	≤ 10	± 0.40 dB	0.03 dB
3.0 < f ≤ 7.5	≤ 10	± 0.40 dB	0.25 dB
IF phase linearity (deviation from mean phase linearity, nominal)			
Center frequency (GHz)	Span (MHz)	Peak-to-peak	RMS
≤ 3.0	≤ 10	0.5 °	0.2 °
3.0 < f ≤ 7.5	≤ 10	2.7 °	2.4 °
Data acquisition (standard 10 MHz IF path)			
Time record length	4,000,000 IQ sample pairs		
Sample rate	30 MSa/s		
ADC resolution	14 Bits		
Option B25 25 MHz analysis bandwidth			
IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)			
Center frequency (GHz)	Span (MHz)	Max. error	RMS (nominal)
≤ 3.0	10 to ≤ 25	± 0.45 dB	0.03 dB
3.0 < f ≤ 7.5	10 to ≤ 25	± 0.45 dB	0.65 dB
IF phase linearity (deviation from mean phase linearity, nominal)			
Center frequency (GHz)	Span (MHz)	Peak-to-peak	RMS
0.02 ≤ f < 3.0	10 to ≤ 25	2.7 °	0.9 °
3.0 < f ≤ 7.5	10 to ≤ 25	4.7 °	2.2 °
Data acquisition (B25 IF path)			
Time record length			
IQ analyzer	4,000,000 IQ sample pairs		
Sample rate	90 MSa/s		
ADC resolution	14 Bits		

Related Literature

Literature	Pub number
N9000A CXA X-Series Signal Analyzer - Brochure	5990-3927EN
CXA Signal Analyzer N9000A - Configuration Guide	5990-4341EN

For more information or literature resources please visit the web:
www.keysight.com/find/N9000A

Web


Product page:
www.keysight.com/find/N9000A

X-Series measurement applications:
www.keysight.com/find/X-Series_Apps

X-Series signal analyzers:
www.keysight.com/find/X-Series

From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. **Unlocking measurement insights since 1939.**

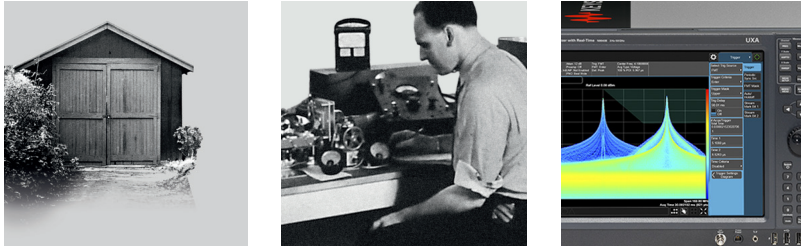

1939 THE FUTURE

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada (877) 894 4414
 Brazil 55 11 3351 7010
 Mexico 001 800 254 2440
 United States (800) 829 4444

Asia Pacific

Australia 1 800 629 485
 China 800 810 0189
 Hong Kong 800 938 693
 India 1 800 11 2626
 Japan 0120 (421) 345
 Korea 080 769 0800
 Malaysia 1 800 888 848
 Singapore 1 800 375 8100
 Taiwan 0800 047 866
 Other AP Countries (65) 6375 8100

Europe & Middle East

Austria 0800 001122
 Belgium 0800 58580
 Finland 0800 523252
 France 0805 980333
 Germany 0800 6270999
 Ireland 1800 832700
 Israel 1 809 343051
 Italy 800 599100
 Luxembourg +32 800 58580
 Netherlands 0800 0233200
 Russia 8800 5009286
 Spain 800 000154
 Sweden 0200 882255
 Switzerland 0800 805353
 Opt. 1 (DE)
 Opt. 2 (FR)
 Opt. 3 (IT)
 United Kingdom 0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-02-10-16)



www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System

myKeysight

myKeysight

www.keysight.com/find/mykeysight
 A personalized view into the information most relevant to you.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty
 Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans
 Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Infoline

Keysight Infoline

www.keysight.com/find/service
 Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

Keysight Channel Partners

www.keysight.com/find/channelpartners
 Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/cxa
www.keysight.com/find/N9000A
www.keysight.com/find/X-Series_Apps
www.keysight.com/find/X-Series