

# Keysight Technologies U1250 Series Handheld Digital Multimeters

Data Sheet



Test more – more safely



Unlocking Measurement Insights

The Keysight Technologies, Inc. U1250 Series handheld digital multimeters (DMMs) exceed your expectations by delivering powerful features and performance that meet your toughest requirements and applications. The series latest multimeters, the offering capabilities and functions you need.

## Key Features

- Superior contrast from organic LED (OLED) display<sup>1</sup>
- 50,000-count dual display
- Up to 0.025% basic DCV accuracy
- True-RMS AC and AC+DC<sup>2</sup> measurements
- K-type and J-type<sup>2</sup> temperature measurements
- Manual and automated (interval) data logging; internally to DMM and externally to PC
- CAT III 1000 V and CAT IV 600 V safety protection
- Built-in 20-MHz frequency counter<sup>2</sup>
- Built-in programmable square-wave generator<sup>2</sup>

## Do More with Just One Instrument

The basic model, U1251B, expands your capabilities beyond typical DMM measurements to include data logging. The U1252B starts with the same foundation, and then adds a 20-MHz frequency counter and programmable square-wave generator—so you'd be able to perform more tests conveniently with one tool. What's more: both models come bundled with a complete set of accessories to equip you right from the start at no extra cost.

Offering the same functionality as the U1252B, the U1253B is the world's first OLED handheld DMM. You won't have to squint to be sure you're reading it right: On the go or on the bench, you'll get crystal-clear viewing indoors, even in dark, off-angle situations.



Figure 1. Automate recording of measurements with bundled GUI data-logging software.

## Find Problems Quickly

Troubleshooting can be tricky, especially when you're dealing with elusive problems. With the U1250 Series' data logging capability, you can ensure that every reading gets recorded manually or at intervals you specify. Better yet: you can have virtually unlimited data logging saves when you connect any of the U1250 Series DMM to a PC with the optional IR-to-USB cable.

In addition, the U1250 Series lets you achieve greater confidence in your measurements with accurate true-RMS AC measurements, low DCV error rate of up to 0.025% and high-resolution display of 50,000 counts.

## Uncompromising Ruggedness and Safety

The U1250 Series DMMs are housed in robust overmold enclosures, rated at CAT III 1000 V and CAT IV 600 V and operate over a wide temperature range of -20 °C to +55 °C. Each DMM also include a 30 kA high energy fuse to further protect you against violent fuse failures during high-current measurements. Built tough and certified to stringent industrial standards, the U1250 DMM is what you need to face the demands of everyday tasks.

1. U1253B model  
2. U1252B/U1253B models

## Take a Closer Look



OLED display with approximately 160° viewing angle, and high contrast ratio of 2000:1 for crystal-clear viewing<sup>1</sup>



50,000 count dual display with true-RMS reading capability



1. U1253B only  
2. U1252B/U1253B only

## DC Specifications

Function	Range	Resolution	Test current/ burden voltage	Accuracy ± (% of reading + no. of least significant digit)	
				U1251B	U1252B/U1253B
Voltage <sup>1</sup>	50.000 mV	0.001 mV	–	0.05 + 50 <sup>2</sup>	0.05 + 50 <sup>2</sup>
	500.00 mV	0.01 mV	–	0.03 + 5	0.025 + 5
	1000.0 mV	0.1 mV	–		
	5.0000 V	0.0001 V	–		
	50.000 V	0.001 V	–	0.03 + 5	0.03 + 5
	500.00 V	0.01 V	–		
	5000.0 V	0.1 V	–		
10000.0 V	1.0 V	–			
Resistance <sup>3</sup>	500.00 Ω <sup>5</sup>	0.01 Ω	1.04 mA	0.08 + 10	0.05 + 10
	5.0000 kΩ <sup>5</sup>	0.0001 kΩ	416 μA	0.08 + 5	0.05 + 5
	50.000 kΩ	0.001 kΩ	41.2 μA		
	500.00 kΩ	0.01 kΩ	4.12 μA		
	5.0000 MΩ	0.0001 MΩ	375 nA	0.2 + 5	0.15 + 5
	50.000 MΩ <sup>6</sup>	0.001 MΩ	187 nA	1 + 10	1 + 5
	500.00 MΩ <sup>6</sup>	0.01 MΩ	187 nA	N/A	3+10 < 200 MΩ / 8+10 > 200 MΩ
	500.00 nS <sup>7</sup>	0.01 nS	187 nA	1 + 20	1 + 10
Current	500.00 μA	0.01 μA	0.06 V (100 Ω)	0.1 + 5 <sup>8</sup>	0.05 + 5 <sup>8</sup>
	5000.0 μA	0.1 μA	0.6 V (100 Ω)		
	50.000 mA	0.001 mA	0.09 V (1 Ω)	0.2 + 5 <sup>8</sup>	0.15 + 5 <sup>8</sup>
	440.00 mA	0.01 mA	0.9 V (1 Ω)		
	5.0000 A	0.0001 A	0.2 V (0.01 Ω)	0.3 + 10	0.3 + 10
	10.000 A <sup>9</sup>	0.001 A	0.4 V (0.01 Ω)		
Diode test <sup>8</sup>	–	0.1 mV	1.04 mA	0.05 + 5	

- Input impedance: Refer to Table A on page 10.
- The accuracy could be improve to 0.05%+10 for U1251B or 0.05%+5 for U1252B and U1253B by using the Null function to zero out the thermal effect before measuring the signal.
- These specifications are defined for 2-wire ohms using Math Null. Without Math Null, add 0.2 ohm additional error.
- Maximum open voltage: < +4.2 V
- The accuracy of 500 Ω and 5 kΩ is specified after NULL function, which is used to subtract the test lead resistance and the thermal effect.
- For the range of 50 MΩ and 500 MΩ, the R.H. is specified for <60%.
- The accuracy is specified for <50 nS and after NULL function with open test lead.
- Always use the NULL function to zero out thermal effect with open test lead before measuring the signal. If the NULL function is not used, an additional 20 counts needs to be added to the DC current accuracy. Thermal effect could occur due to the following:
  - Wrong operation to measure the high voltage of 50 V ~ 1000 V for resistance, diode, and mV measurements.
  - After battery-charging has completed.
  - After measuring a current greater than 440 mA, it is suggested that the meter be left to cool down for twice the measuring time used.
- Current can be measured up to 10 A continuously. An additional 0.5% needs to be added to the specified accuracy if the signal measured is in the range of 10 A~20 A for 30 seconds maximum. After measuring a current of > 10 A, leave the meter to cool down for twice the measuring time used before application of low current measurement.

## U1251B AC voltage specifications

Function	Range	Resolution	Accuracy ± (% of reading + no. of least significant digit)			
			Frequency			
			30 Hz ~ 45 Hz	45 Hz ~ 1 kHz	1 kHz ~ 5 kHz	5 kHz ~ 30 kHz
True RMS AC voltage <sup>1 2</sup>	50.000 mV	0.001 mV	1.0+60	0.6+40	1.0+40	1.6+60
	500.00 mV	0.01 mV		0.6+25		
	1000.0 mV	0.1 mV	1.0+25	1.0+40	3.5+120	
	5.0000 V	0.0001 V				
	50.000 V	0.001 V				
	500.00 V	0.01 V	0.6+40	1.0+40	N/A	
	1000.0 V	0.1 V			N/A	

## U1251B AC current specifications

Function	Range	Resolution	Accuracy ± (% of reading + no. of least significant digit)		
			Frequency		
			30 Hz ~ 45 Hz	45 Hz ~ 2 kHz	2 kHz ~ 20 kHz <sup>6</sup>
AC current <sup>2</sup>	500.00 µA <sup>3</sup>	0.01 µA	1.5+50	0.8+20	3.0+80
	5000.0 µA	0.1 µA	1.5+40		3.0+60
	50.000 mA	0.001 mA	2.0+40 <sup>5</sup>	0.8+20	3+60, <3 A/5 kHz
	440.00 mA	0.01 mA			
	5.0000 A	0.0001 A			
	10.000 A <sup>4</sup>	0.001 A			

## U1252B/U1253B AC voltage specifications

Function	Range	Resolution	Accuracy ± (% of reading + no. of least significant digit)				
			Frequency				
			20 Hz ~ 45 Hz	45 Hz ~ 1 kHz	1 kHz ~ 5 kHz	5 kHz ~ 15 kHz	15 kHz~100 kHz <sup>8</sup>
True RMS AC voltage <sup>17</sup>	50.000 mV	0.001 mV	1.5+60	0.4+40	0.7+40	0.75+40	3.5+120
	500.00 mV	0.01 mV		0.4+25	0.4+25		
	1000.0 mV	0.1 mV	1.5+60	0.4+25	0.7+40	0.75+40	3.5+120
	5.0000 V	0.0001 V					
	50.000 V	0.001 V					
	500.00 V	0.01 V	0.4+40	0.4+40	N/A	N/A	
	1000.0 V	0.1 V			N/A	N/A	

## U1252B/U1253B AC current specifications

Function	Range	Resolution	Accuracy ± (% of reading + no. of least significant digit)			
			Frequency			
			20 Hz ~ 45 Hz	45 Hz ~ 1 KHz	1 KHz ~ 20 KHz <sup>6</sup>	20 KHz~100 KHz <sup>6 8</sup>
True RMS AC current <sup>7</sup>	500.00 µA <sup>3</sup>	0.01 µA	1.0+20	0.7+20	0.75+20	5.0+80
	5000.0 µA	0.1 µA				
	50.000 mA	0.001 mA				
	440.00 mA	0.01 mA		1.5+20		
	5.0000 A	0.0001 A	1.5+20 <sup>5</sup>		3+60, <3 A/5 kHz	N/A
	10.000 A <sup>4</sup>	0.001 A				

## U1252B/U1253B AC+DC voltage specifications

Function	Range	Resolution	Accuracy ± (% of reading + no. of least significant digit)				
			Frequency				
			30 Hz ~ 45 Hz	45 Hz ~ 1 kHz	1 kHz ~ 5 kHz	5 kHz ~ 15 kHz	15 kHz~100 kHz <sup>8</sup>
True RMS AC voltage <sup>1 2</sup>	50.000 Mv	0.001 Mv	1.5+80	0.4+60	0.7+60	0.8+60	3.5+220
	500.00 mV	0.01 mV	1.5+65	0.4+30	0.4+30	0.8+45	3.5+125
	1000.0 mV	0.1 mV					
	5.0000 V	0.0001 V			0.6+30	1.5+45	
	50.000 V	0.001 V		0.4+30			
	500.00 V	0.01 V				N/A	N/A
	1000.00 V	0.1 V		0.4+45	0.4+45	N/A	N/A

## U1252B/U1253B AC+DC current specifications

Function	Range	Resolution	Accuracy ± (% of reading + no. of least significant digit)		
			Frequency		
			30 Hz ~ 45 Hz	45 Hz ~ 1 kHz <sup>6</sup>	1 kHz ~ 20 kHz <sup>6</sup>
True RMS AC current	500.00 µA <sup>3</sup>	0.01 µA	1.1+25	0.8+25	0.8+25
	5000.0 µA	0.1 µA			
	50.000 mA	0.001 mA	1.2+25	0.9+25	0.9+25
	440.00 mA	0.01 mA			
	5.0000 A	0.0001 A	1.8+30 <sup>5</sup>	0.9+30	3.3+70, <3 A/5 kHz
	10.000 A <sup>4</sup>	0.001 A		0.9+25	

1. Input impedance: Refer to Table A on page 10.
2. AC mV/V and AC µA/mA/A specifications are true RMS AC coupled, valid from 5% to 100% of range. The crest factor may be up to 3 at full scale, up to 5 at half- scale, except for 1000 mV and 1000 V ranges, where the crest factor is 1.5 at full scale and 3 at half scale.
3. Input current >35 µARMS.
4. Current can be measured from 2.5 A up to 10 A continuously. An additional 0.5% needs to be added to the specified accuracy if the signal measured is in the range of 10 A ~ 20 A for 30 seconds maximum. After measuring a current of >10 A, leave the meter to cool down for twice the measuring time used before application of low current measurement.
5. Input current < 3 ARMS.
6. These specifications are for typical performance.
7. Crest factor ≤ 3.0 at full scale, 5.0 at half scale except the 1000 mV and 1000 V ranges where it is 1.5 at full scale, 3.0 at half scale. For non-sinusoidal waveform, add 0.1 % of reading ± 0.3 % of range.
8. Additional error to be added for frequency > 15 kHz and signal input < 10 % of range: 3 counts of LSD per kHz.
9. 2% over-range on all ranges except AC 1000 V range

## U1251B/U1252B temperature specifications

Thermocouple type	Range		Resolution	Accuracy	
	°C	°F		°C	°F
K	-200 ~ 1372 °C	-328 ~ 2502 °F	0.1 °C/0.1 °F	0.3% + 3 °C	0.3% + 6 °F
J (for U1252A/U1252B)	-210 ~ 1200 °C	-346 ~ 2192 °F	0.1 °C/0.1 °F	0.3% + 3 °C	0.3% + 6 °F

U1253B temperature specifications <sup>1 2 3</sup>

Thermocouple type	Range		Resolution	Accuracy	
	°C	°F		°C	°F
K	-200 ~ -40 °C	-104 ~ -40 °F	0.1 °C/0.1 °F	1% + 3 °C	1% + 5.4 °F
	-40 ~ 1372 °C	-40 ~ 2502 °F	0.1 °C /0.1 °F	1% + 1 °C	1% + 1.8 °F
J	-210 ~ -40 °C	-346 ~ -40 °F	0.1 °C /0.1 °F	1% + 3 °C	1% + 5.4 °F
	-40 ~ 1200 °C	-40 ~ 2192 °F	0.1 °C /0.1 °F	1% + 1 °C	1% + 1.8 °F

## Capacitance specifications

Range	Resolution	Accuracy	Measuring rate at full scale	Maximum display
10.000 nF	0.001 nF	1% + 8	4 times/sec.	11000 counts
100.00 nF	0.01 nF	1% + 5		
1000.0 nF	0.1 nF			
10.000 µF	0.001 µF			
100.00 µF	0.01 µF			
1000.0 µF	0.1 µF			
10.000 mF	0.001 mF	3% + 10	1 time/sec.	
100.00 mF	0.01 mF		0.1 times/sec.	
			0.01 times/sec	

1. The accuracy does not include the tolerance of the thermocouple probe. The thermal sensor plugged into the meter should be placed in the operating environment for at least an hour.
2. Use the Null function to reduce the thermal effect. Before using the Null function, set the meter to no ambient compensation (OC) mode and keep the thermocouple probe as close to the meter as possible, avoiding contact with any surface that has a different temperature from the ambient temperature.
3. When measuring temperature with respect to any temperature calibrator, try to set both the calibrator and the meter with an external reference (without internal ambient compensation). If both the calibrator and the meter are set with internal reference (with internal ambient compensation), deviation may show between the readings of the calibrator and the meter, due to differences in ambient compensation between the calibrator and the meter.

Frequency specifications<sup>5</sup>

Range	Resolution	Accuracy		Min. input frequency <sup>1</sup>
		U1251B/2B	U1253B	
99.999 Hz	0.001 Hz	0.02%+3 <sup>9</sup>	0.02%+3 <sup>9</sup>	1 Hz
999.99 Hz	0.01 Hz	0.02%+3, <600 kHz	0.02%+3, <600 kHz	
9.9999 kHz	0.0001 kHz			
99.999 kHz	0.001 kHz			
999.99 kHz	0.01 kHz			

## U1251B frequency sensitivity during voltage measurement

Frequency sensitivity and trigger level				
Input range <sup>3</sup>	Minimum sensitivity (R.M.S. Sine Wave)		Trigger level for DC coupling	
(Maximum input for specified accuracy = 10 x Range or 1000 V)	20 Hz - 100 kHz	>100 kHz ~ 200 kHz	< 100 kHz	>100 kHz ~ 200 kHz
50.000 mV	10 mV	15 mV	10 mV	15 mV
500.00 mV	25 mV	35 mV	60 mV	70 mV
1000.0 mV	40 mV	50 mV	100 mV	150 mV
5.0000 V	0.25 V	0.5 V	0.5 V / 1.25 V (< 100 Hz)	0.6 V
50.000 V	2.5 V	5 V	5 V	6 V
500.00 V	25 V	N/A	50 V	N/A
1000.0 V	50 V	N/A	300 V	N/A

## U1252B/U1253B frequency sensitivity during voltage measurement

Frequency sensitivity and trigger level				
Input range <sup>3</sup>	Minimum sensitivity (RMS sine wave)		Trigger level for DC coupling	
(Maximum input for specified accuracy = 10 x range or 1000 V)	20 Hz ~ 200 kHz	>200 kHz ~ 500 kHz	< 100 kHz	>100 kHz ~ 500 kHz
50.000 mV	10 mV	25 mV	10 mV	25 mV
500.00 mV	70 mV	150 mV	70 mV	150 mV
1000.0 mV	120 mV	300 mV	120 mV	300 mV
5.0000 V	0.3 V	1.2 V	0.6 V	1.5 V
50.000 V	3 V	5 V	6 V	15 V
500.00 V	30 V < 100 kHz	N/A	60 V	N/A
1000.0 V	50 V < 100 kHz	N/A	120 V	N/A

## Frequency sensitivity during current measurement

Input range	Minimum sensitivity (RMS sine wave) 20 Hz ~ 20 KHz
500.00 µA	100 µA
5000.0 µA	250 µA
50.000 mA	10 mA
440.00 mA	25 mA
5.0000 A	1 A
10.000 A	2.5 A

1. The input signal is lower than the product of 20000000 V x Hz (product voltage and frequency); overload protection: 1000 V.
2. The multimeter will automatically select the most appropriate range when making frequency measurements.
3. Maximum input for specified accuracy = 10 x range or 1000 V.



## Peak hold

Signal width	Accuracy for DC mV/voltage/current
Single event > 1 ms	2% + 400 for all ranges
Repetitive > 250 $\mu$ s	2% + 1000 for all ranges

Duty cycle and pulse width <sup>1</sup>

Function	Mode	Range	Accuracy at full scale
Duty cycle	DC Coupling	0.01% ~ 99.99%	0.3% per kHz + 0.3%
Pulse width	500 ms	0.01 ms	0.2% + 3
	2000 ms	0.1 ms	0.2% + 3

1. The positive or negative pulse width must be greater than 10  $\mu$ s, and the duty cycle range should be considered. The pulse width range is determined by the frequency of the signal.

## U1252B/U1253B frequency counter specifications

Division	Range	Resolution	Accuracy $\pm$ (% of reading + no. of least significant digit)		Sensitivity	Min. input frequency	Maximum measurement level
			U1252B	U1253B			
1 (secondary display "-1-")	99.999 Hz	0.001 Hz	0.02% + 3 <sup>1</sup>	0.02% + 3 <sup>1</sup>	100 mV R.M.S.	0.5 Hz	< 30 Vpp
	999.99 Hz	0.01 Hz	0.002% + 5, <985 kHz	0.002% + 5, < 985 kHz			
	9.9999 kHz	0.0001 kHz					
	99.999 kHz	0.001 kHz	200 mV R.M.S.				
	999.99 kHz	0.01 kHz					
9.9999 MHz	0.0001 MHz	0.002% + 5, < 1 MHz					
100 (secondary display "-100-")	9.9999 MHz	0.0001 MHz	0.002% + 5, < 20 MHz	0.002% + 5, < 20 MHz	400 mV R.M.S.	1 MHz	
	99.999 MHz	0.001 MHz			600 mV R.M.S.		

## U1252B/U1253B square wave output

Output <sup>2</sup>	Range	Resolution	Accuracy
Frequency	0.5, 1, 2, 5, 6 <sup>6</sup> , 10, 15, 20, 25, 30, 40, 50, 60, 75, 80, 100, 120, 150, 200, 240, 300, 400, 480, 600, 800, 1200, 1600, 2400, 48000 Hz	0.01 Hz	0.005% + 2
Duty cycle <sup>3</sup>	0.39% ~ 99.60%	0.390625%	0.4% of full scale <sup>4</sup>
Pulse width <sup>4</sup>	1/frequency	Range/256	0.2 ms + range/256
Amplitude	Fixed 0 ~ +2.8 V	0.1 V	0.2 V

## Display rate

Function	Times/second
ACV	7
ACV + dB	7
DCV	7
AC + DC V	2
$\Omega$ /nS	14
Diode	14
Capacitance	4 (< 100 $\mu$ F)
DCI	7
ACI	7
AC + DC I	2
Temperature	6
Frequency	1 (>10 Hz)
Duty cycle/pulse width	0.5 (>10 Hz)

## Manual and interval data logging

Logging type	Maximum data points <sup>5</sup>		
	U1251B	U1252B	U1253B
Manual	100	100	100
Interval	200	200	1000

## Decibel (Db) calculation

dB Base	Reference	Default reference
1 m $\Omega$ (dBm)	1-9999 $\Omega$	50 $\Omega$
1 V (dBV)	1 V	1 V

1. All frequency counters are susceptible to errors. Shielding inputs from external noise pickup is critical to minimize measurement errors. For non-square wave signals, add 5 counts.
2. Output impedance: 3.5 k $\Omega$  maximum.
3. The positive or negative pulse width must be greater than 50  $\mu$ s for adjustment of the duty cycle or pulse width under different frequencies. Otherwise, the accuracy and range will be different from the specifications defined.
4. For signal frequencies greater than 1 kHz, an addition of 0.1% per kHz is added to the accuracy.
5. For data logging to PC, maximum number of data points is dependent on available hard disk space.
6. For the U1253B model.

## Input impedance

Table A

Function	Range	U1251B	U1252B/U1253B
DC voltage	50 mV to 1000 mV	10 M $\Omega$	10 M $\Omega$
	5 V to 1000 V	10 M $\Omega$ (nominal), with 10 M $\Omega$ in parallel at dual display	10 M $\Omega$ (nominal), with 10 M $\Omega$ in parallel at dual display
AC voltage	50 mV to 1000 mV	10 M $\Omega$ in parallel with < 100 pF	10 M $\Omega$ in parallel with < 100 pF
	5 V to 1000 V		
AC + DC voltage	50 mV to 1000 mV	N/A	10 M $\Omega$
	5 V to 1000 V		10 M $\Omega$ (nominal) in parallel with 10 M $\Omega$ , < 100 pF

## General Specifications

---

### Display

Both primary and secondary displays are 5-digit on the LCD display.  
Both the primary and secondary displays offer a maximum resolution of 50,000 counts.  
Automatic polarity indication.

---

### Connectivity

IR to USB

---

### Power consumption

105 mVA/420 mVA (with backlight) maximum (U1251B)  
165 mVA/480 mVA (with backlight) maximum (U1252B)  
420 mVA maximum (U1253B)

---

### Battery type

9 V alkaline battery (ANSI/NEDA 1604A or IEC 6LR61)  
9 V carbon-zinc battery (ANSI/NEDA 1604D or IEC6F22)  
7.2 V or 8.4 V Ni-MH rechargeable battery

---

### Battery life

U1251B: 72 hours typical  
U1252B: 36 hours typical  
U1253B: 8 hours typical

---

### Operating environment

- Full accuracy at  $-20\text{ }^{\circ}\text{C}$  to  $55\text{ }^{\circ}\text{C}$ ; and to 80% RH for temperatures up to  $35\text{ }^{\circ}\text{C}$ , decreasing linearly to 50% RH at  $55\text{ }^{\circ}\text{C}$
- 0 to 2000 m altitude per IEC 61010-1 2nd Edition CAT III, 1000 V/CAT IV, 600 V

---

### Storage compliance

$-40\text{ }^{\circ}\text{C}$  to  $70\text{ }^{\circ}\text{C}$  with battery removed

---

### Safety compliance

- IEC 61010-1:2001/EN610101-1:2001
- Canada: CSA C22.2 No. 61010-1:2004

---

### Measurement category

CAT III 1000 V / CAT IV 600 V

---

### Emc compliance

Certified to IEC/EN 61326: 2002, CISPR 11, and equivalents for Group 1, Class A

---

### Common mode rejection ratio (CMRR)

U1251B/U1252B:  $>90\text{ dB}$  at DC, 50/60 Hz  $\pm 0.1\%$  (1 kW unbalanced)  
U1253B:  $>100\text{ dB}$  at DC, 50/60 Hz  $\pm 0.1\%$  (1 kW unbalanced)

---

### Normal mode rejection ratio (NMRR)

U1251B/U1252B:  $>60\text{ dB}$  at DC, 50/60 Hz  $\pm 0.1\%$   
U1253B:  $>90\text{ dB}$  at DC, 50/60 Hz  $\pm 0.1\%$

---

### Temperature coefficient

$0.15 * (\text{specified accuracy})/^{\circ}\text{C}$  (from  $20\text{ }^{\circ}\text{C}$  to  $18\text{ }^{\circ}\text{C}$  or  $28\text{ }^{\circ}\text{C}$  to  $55\text{ }^{\circ}\text{C}$ )

---

### Shock and vibration

Tested to IEC/EN 60068-2

---

### Dimensions (HxWxD)

203.5 mm x 94.4 mm x 59.0 mm

---

### Weight

U1251B:  $504\pm 5\text{ g}$  with battery  
U1252B/U1253B:  $527\pm 5\text{ g}$  with battery

---

### Warranty

3 years for main unit  
3 months for standard accessories unless otherwise specified.

---

## Ordering Information



### Standard shipped accessories

Description	Applicable Models		
	U1251B	U1252B	U1253B
Alligator clips	✓	✓	✓
SMT grabbers	-	-	-
Fine-tip test probes	-	-	-
Test probe leads (4-mm)	✓	✓	✓
Mini grabber	-	-	-
Alkaline 9 V battery	✓	-	-
Rechargeable Ni-MH battery with power adapter	-	✓	✓
Soft carrying case	-	-	-
Certificate of calibration	✓	✓	✓
Test Report	✓	✓	✓
Quick Start Guide	✓	✓	✓

## Optional Accessories

### Measuring accessories (non-temperature)



#### U1161A extended test lead kit

Includes two test leads (red and black), two test probes, medium-sized alligator clips and 4-mm banana plugs.

- Test leads: CAT III 1000 V, CAT IV 600 V, 15 A
- Test probes: CAT III 1000 V, CAT IV 600 V, 15 A
- Medium sized alligator clips: CAT III 1000 V, CAT IV 600 V, 15 A
- 4-mm banana plugs: CAT II 600 V, 10 A

#### U1162A alligator clips

- One pair of insulated alligator clips (red and black). Recommended for use with Keysight standard test leads.
- Rated CAT III 1000 V, CAT IV 600 V, 15 A.



#### U1163A SMT grabbers

- One pair of SMT grabbers (red and black). Recommended for use with Keysight standard test leads.
- Rated CAT II 300 V, 3 A.



#### U1164A fine-tip test probes

- One pair of fine-tip test probes (red and black). Recommended for use with Keysight standard test leads.
- Rated CAT II 300 V, 3 A.

## Optional Accessories (continued)

### Measuring accessories (non-temperature, continued)



U1168A standard test lead kit

Includes two test leads (red and black), 19-mm and 4-mm test probes, alligator clips, fine-tip test probes, SMT grabbers and mini grabber (black).

- Test leads: CAT III 1000 V, CAT IV 600 V, 15 A
- Test probes (19mm tip): CAT II 1000 V, 15 A
- Test probes (4-mm tip): CAT III 1000 V, CAT IV 600 V, 15 A (highly recommended for CAT IV environment)
- Alligator clips: CAT III 1000V, CAT IV 600 V, 15 A
- Fine-tip test probes: CAT II 300 V, 3 A
- SMT grabber: CAT II 300 V, 3 A
- Mini grabber: CAT II 300 V, 3 A



U1169A test probe leads

Includes two test leads (red and black), and a pair each of 19-mm and 4-mm test probes.

- Test leads: CAT III 1000 V, CAT IV 600 V, 15 A
- Test probe (19-mm tip): CAT II 1000 V, 15 A
- Test probes (4-mm tip): CAT III 1000 V, CAT IV 600 V, 15 A (highly recommended for CAT IV environment)



U1583B AC current clamp

- Dual range: 40 A and 400 A
- Rated CAT III 600 V
- BNC-to-banana-plug adapter provided for use with DMMs

### Measuring accessories (temperature)



U1180A thermocouple adapter+lead kit, J and K types

Includes thermocouple adapter, thermocouple bead J-type and thermocouple bead K-type.

- T/C adapter J/K-type
- T/C bead J-type:  $-20\text{ }^{\circ}\text{C}$  to  $200\text{ }^{\circ}\text{C}$
- T/C bead K-type:  $-20\text{ }^{\circ}\text{C}$  to  $200\text{ }^{\circ}\text{C}$



U1181A immersion temperature probe

- Type-K T/C for use in oil and other liquids
- Measurement range:  $-50\text{ }^{\circ}\text{C}$  to  $700\text{ }^{\circ}\text{C}$
- Includes adapter U1184A for connection to DMM



U1182A industrial surface temperature probe

- Type-K T/C for use on still surfaces
- Measurement range:  $-50\text{ }^{\circ}\text{C}$  to  $400\text{ }^{\circ}\text{C}$
- Includes adapter U1184A for connection to DMM




U1183A air temperature probe

- Type-K T/C for use in air and non-caustic gas
- Measurement range:  $-50\text{ }^{\circ}\text{C}$  to  $800\text{ }^{\circ}\text{C}$
- Includes adapter U1184A for connection to DMM



U1184A temperature probe adapter

- Mini-connector-to-banana-plug adapter for use with DMM

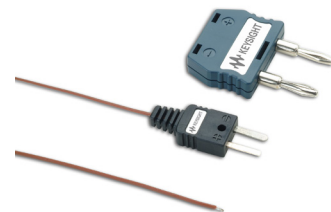

U1185A J-type thermocouple and adapter

- T/C adapter J/K-type
- T/C bead J-type:  $-20\text{ }^{\circ}\text{C}$  to  $200\text{ }^{\circ}\text{C}$

## Measuring accessories (temperature, continued)



### U1186A K-type thermocouple and adapter

- T/C adapter J/K-type
- T/C bead J-type: -20 °C to 200 °C

### Cable



### U1173A IR-to-USB cable

- For remote control and data logging to PC
- Max. baud rate: 19,200 bits per second

### Carrying case



### U1172A transit case (aluminium-clad)

- The robust casing to transport your DMM and accessories
- Aluminum-clad, black panel construction
  - Dimension: 18" (H) x 13" (W) x 6" (D)
  - Weight: 4 kg



### U1174A soft carrying case

- The convenient way to carry your DMM and essential accessories
- Dimension: 9" (H) x 5" (W) x 3" (D)

### Hanging kit



### U1171A magnetic hanging kit

For fastening of DMM to a steel surface so both hands are free.


### AC adaptor



### U1170A AC adaptor

Includes AC power cord based on country

From Hewlett-Packard through Agilent to Keysight  
 For more than 75 years, we've been helping you unlock measurement insights.  
 Our unique combination of hardware, software and people can help you reach  
 your next breakthrough. **Unlocking measurement insights since 1939.**

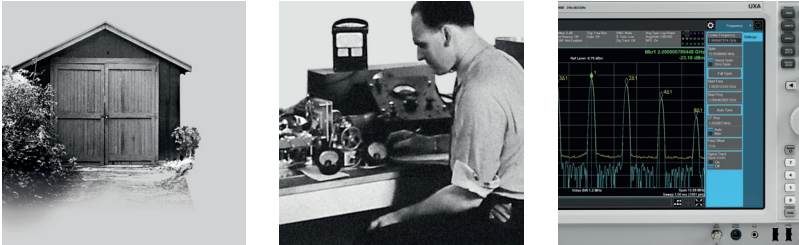

1939 THE FUTURE

**myKeysight**

myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.



**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a full one-year warranty on all accessories, calibration devices, systems and custom products.



**Keysight Assurance Plans**

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.

**Keysight Infoline**

[www.keysight.com/find/service](http://www.keysight.com/find/service)

**Keysight Infoline**

Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/handheldm](http://www.keysight.com/find/handheldm)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

**Asia Pacific**

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

**Europe & Middle East**

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-07-24-15)



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
 Keysight Technologies, Inc.  
 DEKRA Certified ISO 9001:2008  
 Quality Management System

